

# 2012 RENEGADE<sup>®</sup> BACKCOUNTRY<sup>™</sup> X<sup>®</sup>



## PACKAGE HIGHLIGHTS

- REV-XP<sup>™</sup> platform
- SC<sup>™</sup>-5 rear suspension
- KYB Pro 36 aluminum piggyback rear shock with high/low speed compression adjusters
- Lightweight chromoly front suspension lower A-arm
- HPG<sup>™</sup> Plus R aluminum front shocks with no-tool rebound adjuster
- **NEW** Pilot<sup>™</sup> DS skis
- Adjustable ski stance
- Brembo racing brake with stainless-steel braided brake line
- Painted tunnel
- RER<sup>™</sup> electronic reverse
- Multi-function digital gauge with display
- 285-mm / 12-inch windshield with integrated wind deflectors
- Hand wind deflectors
- **NEW** REV-XP X seat with 1,3 gal (5 l) of storage
- **NEW** Wrap kit choices (decals)\*

## EXTRA HIGHLIGHTS

### E-TEC 800R

- Dual air intakes
- **NEW** Track choices

### E-TEC 600 H.O.

- **NEW** Electric start

## ENGINE CHOICE

Engine	Rotax <sup>®</sup> E-TEC <sup>®</sup> 800R	Rotax E-TEC 600 H.O.
Engine details	Liquid-cooled, 3-D R.A.V.E. <sup>™</sup>	Liquid-cooled, 3-D R.A.V.E.
Cylinders	2	2
Displacement	799.5 cc / 48.8 in <sup>3</sup>	594.4 cc / 36.3 in <sup>3</sup>
Bore	82 mm / 3.2 in	72 mm / 2.8 in
Stroke	75.7 mm / 3 in	73 mm / 2.9 in
Maximum engine speed	8000 RPM	8100 RPM
Carburation	Electronic Direct Injection	Electronic Direct Injection
Recommended fuel type	Premium unleaded	Premium unleaded
Minimum octane	91	91
Fuel tank	40 liters / 10.6 gallons	40 liters / 10.6 gallons
Oil tank capacity	3.7 liters / 3.9 quarts	3.7 liters / 3.9 quarts
Exhaust system	Single tuned-pipe, baffle muffler	Single tuned-pipe, baffle muffler

## POWERTRAIN

Drive clutch type	TRA <sup>™</sup> VII	TRA III
Driven clutch type	QRS	QRS
Engagement	3800 RPM	3400 RPM
Small sprocket number of teeth	23	21
Large sprocket number of teeth	45	49
Drive sprocket number of teeth	8	8
Drive sprocket diameter	183 mm / 7.2 in	183 mm / 7.2 in
Brake system	Brembo racing brake with stainless-steel braided brake line	Brembo racing brake with stainless-steel braided brake line

## DRY WEIGHT

208 kg / 459 lb	205 kg / 453 lb
-----------------	-----------------

## FEATURES

Frame	REV-XP	Riser block height	160 mm / 6.3 in	Fuel gauge	Standard
Skis	Pilot <sup>™</sup> DS	Reverse	RER	Temperature gauge	Optional
Seating	REV-XP X with storage	Heated throttle lever	Standard	Mirrors	Optional
Handlebar	Aluminum with J-hooks / Mountain strap	Heated grips	Standard	Windshield	285 mm / 12 in with deflectors
Electric start	Optional Standard (E-TEC 600 H.O.)	Speedometer	Standard	Carbide runner	Standard
		Tachometer	Standard	Hitch	Optional

## COLOR CHOICES

Black / White (E-TEC 800R only)  
Deep Black

## DIMENSIONS

Vehicle overall length	3110 mm / 122.4 in
Vehicle overall width	1159 to 1204 mm / 45.6 to 47.4 in
Vehicle overall height	1130 mm / 44.5 in
Ski stance	975 mm or 1019 mm / 38.4 or 40.1 in
Ski overall length	1040 mm / 41 in
Ski width	165 mm / 6.5 in
Track nominal width	406 mm / 16 in
Track nominal length	3487 mm / 137 in
Track profile height	Choice (E-TEC 800R) 44 mm / 1.75 in – PowderMax <sup>™</sup> (E-TEC 600 H.O.)
Track choices (E-TEC 800R)	44 mm / 1.75 in – PowderMax 38.1 mm / 1.5 in – Charger

## SUSPENSION

Front suspension	Dual A-arms
Front shock	HPG Plus R
Front suspension max. travel	210 mm / 8.3 in
Rear suspension	SC-5
Center shock	HPG Plus
Rear shock	KYB Pro 36
Rear suspension max. travel	406 mm / 16 in



# 2012 RENEGADE<sup>®</sup> BACKCOUNTRY<sup>™</sup> X<sup>®</sup>



## WRAP OPTIONS<sup>®</sup>

Take the promotion offer and customize your sleds with the look you want.




### Drop Zone



### ID



### Tag Yellow

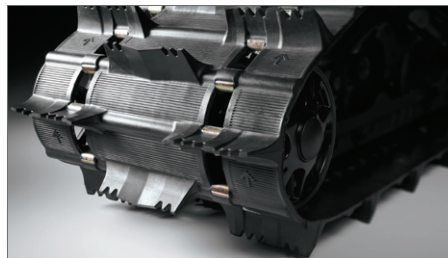

### PowderMax Track

Wide with deep lugs for powder flotation and traction.



### Charger Track (Opt for E-TEC 800R)

Good traction on-trail with great off-trail traction.

\*Wrap kit available for REV-XP Spring-Exclusive models as a Spring promotion choice.